

Dell Vostro V131

Setup And Features Information

About Warnings



WARNING: A WARNING indicates a potential for property damage, personal injury, or death.

Front And Back

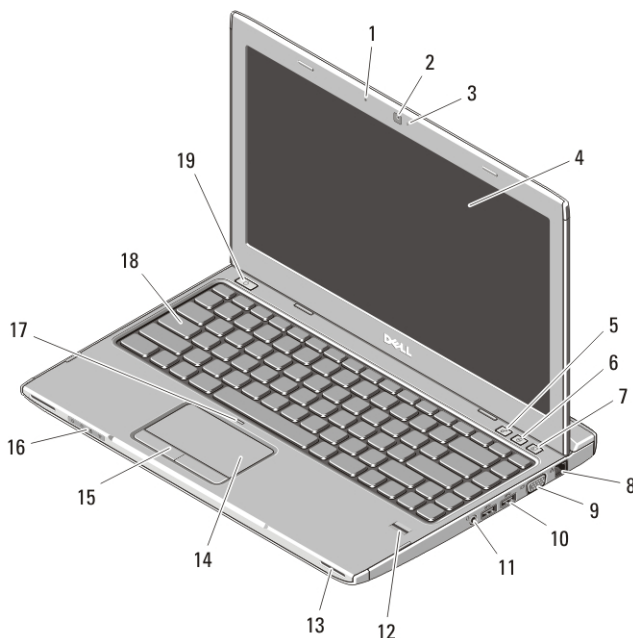


Figure 1. Front View

- | | |
|------------------------|--------------------------------|
| 1. microphone | 5. Windows Mobility Center |
| 2. camera | 6. Dell Support Center |
| 3. camera status light | 7. Dell Instant Launch Manager |
| 4. display | 8. network connector |



04WTNNA00

Regulatory Model : P18S
Regulatory Type : P18S001
2011 - 05

- | | |
|--|--------------------------|
| 9. VGA connector | 15. touchpad buttons (2) |
| 10. USB 3.0 connectors (2) | 16. device status lights |
| 11. headphone and microphone combo connector | 17. touchpad disable LED |
| 12. fingerprint reader | 18. keyboard |
| 13. speakers (2) | 19. power button |
| 14. touchpad | |

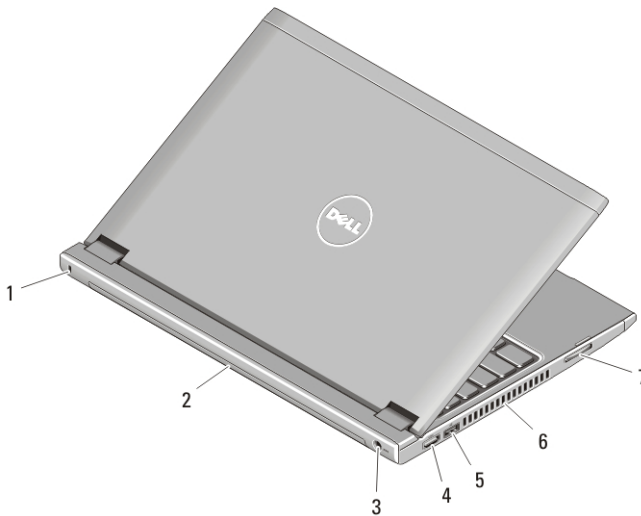


Figure 2. Back View

- | | |
|------------------------|--|
| 1. security cable slot | 5. USB 2.0 connector with USB PowerShare |
| 2. battery | 6. cooling vents |
| 3. power connector | 7. memory card reader |
| 4. HDMI connector | |




WARNING: Do not block, push objects into, or allow dust to accumulate in the air vents. Do not store your Dell computer in a low-airflow environment, such as a closed briefcase, while it is running. Restricting the airflow can damage the computer or cause a fire. The computer turns on the fan when the computer gets hot. Fan noise is normal and does not indicate a problem with the fan or the computer.


USB PowerShare


The USB PowerShare feature allows you to charge USB devices, even when the computer is powered on/off or in sleep state.


- Certain USB devices may not charge when the computer is powered off or in sleep state. In such cases, turn on the computer to charge the device.
- If you turn off your computer while charging a USB device, the device stops charging. To continue charging, disconnect the USB device and connect it again.
- The USB PowerShare feature is automatically shut off when only 10% of the total battery life remains.

Quick Setup

 **WARNING:** Before you begin any of the procedures in this section, read the safety information that shipped with your computer. For additional best practices information, see www.dell.com/regulatory_compliance.

 **WARNING:** The AC adapter works with electrical outlets worldwide. However, power connectors and power strips vary among countries. Using an incompatible cable or improperly connecting the cable to the power strip or electrical outlet may cause fire or equipment damage.

 **CAUTION:** When you disconnect the AC adapter cable from the computer, grasp the connector, not the cable itself, and pull firmly but gently to avoid damaging the cable. When you wrap the AC adapter cable, ensure that you follow the angle of the connector on the AC adapter to avoid damaging the cable.

 **NOTE:** Some devices may not be included if you did not order them.

1. Connect the AC adapter to the AC adapter connector on the computer and to the electrical outlet.




Figure 3. AC Adapter

2. Connect the network cable (optional).




Figure 4. Network Connector

3. Connect USB devices, such as a mouse or keyboard (optional).





Figure 5. USB Connector


4. Open the computer display and press the power button to turn on the computer.



Figure 6. Power Button

 **NOTE:** It is recommended that you turn on and shut down your computer at least once before you install any cards or connect the computer to a docking device or other external device, such as a printer.

Specifications

 **NOTE:** Offerings may vary by region. The following specifications are only those required by law to ship with your computer. For more information regarding the configuration of your computer, click **Start** → **Help and Support** and select the option to view information about your computer.

System Information

Chipset	Intel HM67 Express Chipset
Processor	<ul style="list-style-type: none">• Intel Celeron• Intel Core i3 series• Intel Core i5 series

Video

Video type	integrated on system board
Data bus	integrated video
Video controller:	
Intel Celeron	Intel HD Graphics
Intel i3, i5 and i7 series	Intel HD Graphics 3000

Memory

Memory connector	two SODIMM slots
Memory capacity	2 GB, 4 GB, 6 GB, and 8 GB
Memory type	DDR3, 1333 MHz
Minimum memory	2 GB
Maximum memory	8 GB

Battery

Type	<ul style="list-style-type: none">• 4-cell lithium ion (3.0 Ahr)• 6-cell lithium ion (3.0 Ahr)
------	---

Dimensions:

Depth:

4-cell and 6-cell	48.64 mm (1.91 inches)
-------------------	------------------------

Height:

4-cell	20.20 mm (0.80. inch)
6-cell	31.20 mm (1.23 inch)

Width:

Battery

4-cell and 6-cell	269.30 mm (10.60 inches)
Weight:	
4-cell	240.00 g (0.53 lb)
6-cell	340.00 g (0.75 lb)
Voltage:	
4-cell	14.8 V
6-cell	11.1 V
Temperature range:	
Operating	0 °C to 35 °C (32 °F to 95 °F)
Non-operating	−40 °C to 65 °C (−40 °F to 149 °F)
Coin-cell battery	3 V CR2032 lithium ion

AC Adapter

Type	65 W
Input voltage	100 VAC to 240 VAC
Input current (maximum)	1.5 A, 1.6 A, and 1.7 A
Input frequency	50 Hz to 60 Hz
Output current	4.43 A (maximum at 4-second pulse), 3.34 A (continuous)
Rated output voltage	19.50 VDC (+/− 1.0 VDC)
Dimensions:	
Height	29 mm (1.14 inches)
Width	46.5 mm (1.83 inches)
Depth	107 mm (4.21 inches)
Temperature range:	
Operating	0 °C to 40 °C (32 °F to 104 °F)
Non Operating	−40 °C to 70 °C (−40 °F to 158 °F)

Physical

Height (with a WLED panel)	15.5 mm to 21 mm (0.61 inch to 0.83 inch)
----------------------------	---

Physical

Width	329.3 mm (12.96 inches)
Depth	237.65 mm (9.35 inches)
Weight (Minimum)	1.72kg (3.791 lb)

Environmental

Temperature:

Operating	0 °C to 35 °C (32 °F to 95 °F)
Storage	-40 °C to 65 °C (-40 °F to 149 °F)

Relative humidity (maximum):

Operating	10 % to 90 % (noncondensing)
Storage	5 % to 95 % (noncondensing)

Airborne contaminant level	G1 or lower as defined by ISA-S71.04–1985
----------------------------	---

Finding More Information and Resources

See the safety and regulatory documents that shipped with your computer and the regulatory compliance website at www.dell.com/regulatory_compliance for more information on:

- Safety best practices
- Regulatory certification
- Ergonomics

See www.dell.com for additional information on:

- Warranty
- Terms and Conditions (U.S. only)
- End User License Agreement

Information in this publication is subject to change without notice.

© 2011 Dell Inc. All rights reserved.

Reproduction of these materials in any manner whatsoever without the written permission of Dell Inc. is strictly forbidden.

Trademarks used in this text: Dell™, the DELL logo, Dell Precision™, Precision ON™, ExpressCharge™, Latitude™, Latitude ON™, OptiPlex™, Vostro™, and Wi-Fi Catcher™ are trademarks of Dell Inc. Intel®, Pentium®, Xeon®, Core™, Atom™, Centrino®, and Celeron® are registered trademarks or trademarks of Intel Corporation in the U.S. and other countries. AMD® is a registered trademark and AMD Opteron™, AMD Phenom™, AMD Sempron™, AMD Athlon™, ATI Radeon™, and ATI FirePro™ are trademarks of Advanced Micro Devices, Inc. Microsoft®, Windows®, MS-DOS®, Windows Vista®, the Windows Vista start button, and Office Outlook® are either trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. Blu-ray Disc™ is a trademark owned by the Blu-ray Disc Association (BDA) and licensed for use on discs and players. The Bluetooth® word mark is a registered trademark and owned by the Bluetooth® SIG, Inc. and any use of such mark by Dell Inc. is under license. Wi-Fi® is a registered trademark of Wireless Ethernet Compatibility Alliance, Inc.

Other trademarks and trade names may be used in this publication to refer to either the entities claiming the marks and names or their products, Dell Inc. disclaims any proprietary interest in trademarks and trade names other than its own.